



LEDIONTM ULTRA

LUBT RGB

Technical Specifications

| | | |
|-------------------------|------------------|-----------------|
| Using Single source | LU3 | LU6 |
| Electrical | | |
| Power Consumption @ max | 4.2 | 8.4 |
| Input Voltage | 48V DC | 48V DC |
| Data Connection | RJ45 | RJ45 |
| Driver Compatability | LUD36 [12 Units] | LUD36 [6 Units] |

Environmental

| | | |
|------------------------------|-------------------------------|-------------------------------|
| Operating Ambient Temp Range | -20°C / +40°C | -20°C / +40°C |
| Operating Temp | +50°C @ 25°C Ambient | +50°C @ 25°C Ambient |
| Cooling | Via Convection Cooling System | Via Convection Cooling System |


Mechanical

| | | |
|--------------|------------------------|------------------------|
| Construction | Extruded Acrylic | Extruded Acrylic |
| Flammability | V-1 Flame Class Rating | V-1 Flame Class Rating |

Light Characteristics

| | | |
|---------------------------|---------------------|---------------------|
| Lumen Output Red | 44 | 88 |
| Lumen Output Green | 40 | 80 |
| Lumen Output Blue | 12 | 24 |
| Typical Lumen Maintenance | 70% @ 50,000 Hours | 70% @ 50,000 Hours |
| Lamp Life | 50,000 Hours @ 25°C | 50,000 Hours @ 25°C |

Floor mount Version
Also Suitable for Ceiling and Wall

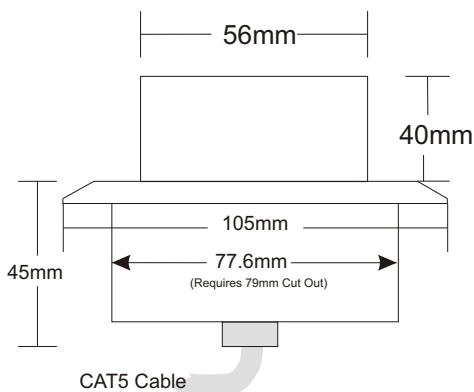

Hanging Version
For Pelmet and Chandelier.

